



120

REVERSIBLE STROLLER

WEATHER
SHIELD

INSTRUCTION MANUAL



More tips and videos on
ergobaby.com


PLEASE READ ALL INSTRUCTIONS BEFORE USE. KEEP THIS FOR YOUR REFERENCE.

This product is designed exclusively for use with 180 Reversible Stroller. It is not intended for use with other strollers or products.


⚠️ WARNING

- Never leave your child unattended in the stroller, with or without the Weather Shield in use.
- DO NOT USE this product in warm weather conditions. Use in higher temperatures can cause unsafe conditions inside the Weather Shield.
- Constantly monitor child when using the Weather Shield. Remove the Weather Shield if the child starts to feel uncomfortable and perspire.
- The stroller sunshade must be correctly installed with the sunshade extension fully tucked in before installing the Weather Shield. This will ensure proper airflow and avoid the danger of suffocation.
- Do not leave the Weather Shield resting or partially installed on the stroller when child is in the seat. Always completely and correctly install the Weather Shield to avoid the danger of suffocation.
- When not in use, keep Weather Shield out of reach of children.
- Before removing your child from the stroller, Weather Shield must be completely removed and placed out of reach.
- Do not use this product other than with the 180 Reversible Stroller. The Weather Shield is not designed to work over an infant car seat on the 180 Reversible Stroller Car Seat Adapter (sold separately).
- Ensure that air vents (highlighted below) are unobstructed. Properly align the Weather Shield so vents can open properly and air is free to flow.

PARENT-FACING

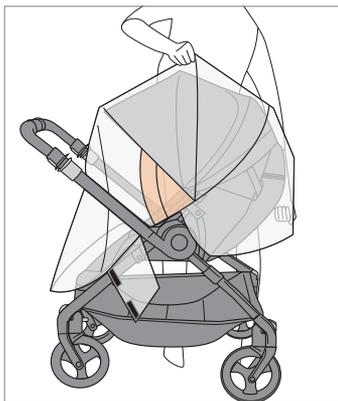

FORWARD-FACING

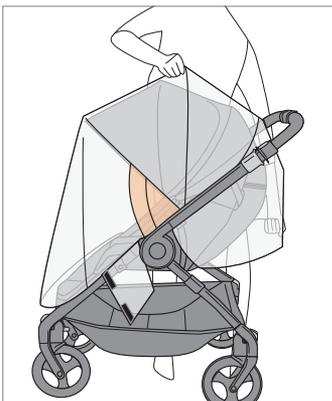

CLEANING INSTRUCTIONS

Wipe with cold water and mild detergent. Air dry.

Warranty: Please see Ergobaby.com for information about our warranty. The ERGO Baby Carrier, Inc. warrants its products against defects in materials and workmanship. We stand behind all our products and will either repair or replace, free of charge during the first 12 months after purchase, any Ergobaby™ stroller accessory that is defective. Proof of purchase is necessary and product must be returned for warranty service. Should you have a warranty claim, please contact Ergobaby Customer Service at: customerservice@ergobaby.com, or 888-416-4888.

Warranty Coverage does not extend to damage caused by misuse or any use of the Stroller Accessory that is not in accordance with the instructions stated in this manual. Warranty coverage does not extend to any Stroller Accessory that has been modified from its original construction in any way. Different or additional warranty rights may exist in the purchaser's jurisdiction. To the extent that different or additional warranty rights exist under the laws of the purchaser's jurisdiction, those warranties shall apply and be in addition to the warranty rights.




THE ERGOBABY CARRIER, INC.

US: 617 West 7th St., Ste. 1000, Los Angeles, CA 90017 | (888) 416-4888 | info@ergobaby.com

IM-180WS-171103-V2

HOW TO INSTALL THE WEATHER SHIELD


Set the stroller parking brakes. Refer to your stroller instruction manual for details.

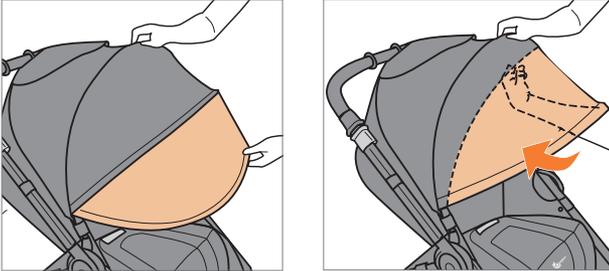


Pull the sunshade all the way forward and tuck the sunshade extension under as far as it will go. The front edge of the sunshade should be taut with no loose fabric drooping down.

Find the black binding on the weather shield with the Ergobaby 180 label, which is oriented to face the front of the weather shield.

PARENT-FACING

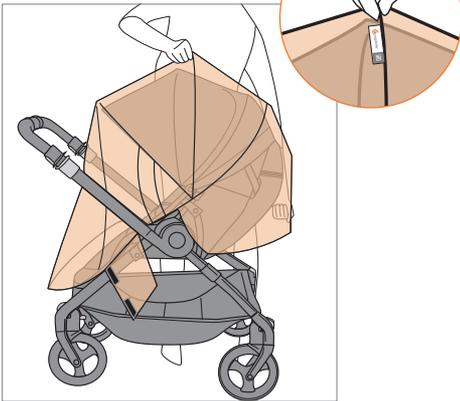


FORWARD-FACING

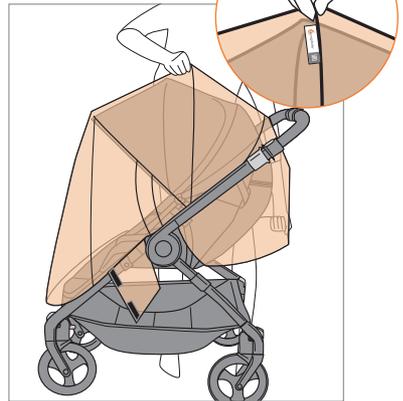


With one hand, hold on to the black binding with the Ergobaby 180 label, and with the other hand, pull the back portion of the weather shield behind the seat. Align the black binding with the peak of the sunshade, as shown in the illustrations above. When aligned correctly the front spar of the weather shield will align with the front edge of the sunshade.



PARENT-FACING

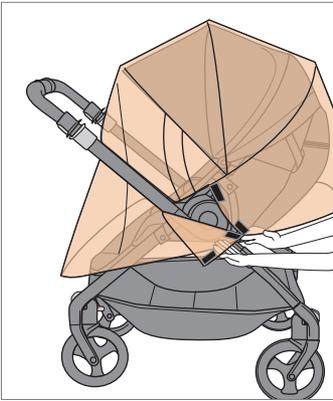

FORWARD-FACING

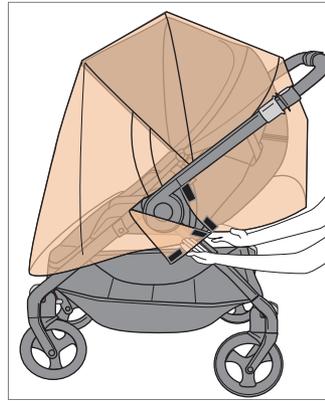

Guide the flap attached to the front of the weather shield toward the back seat pocket and fasten the two velcro strips. Do this for both sides.

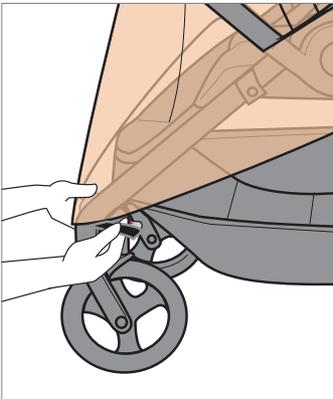

Do not wrap the velcro around the angled leg tube.

Fasten the velcro strip behind the vertical part of the stroller leg. Do this for both sides.

To Remove the Weather Shield

Unfasten all velcro strips and lift the weather shield off the top of the stroller. Place out of reach before unbuckling and removing your child from the stroller.